



## RF Coaxial Connector Guide

### Introduction

There are hundreds of connectors that can be used in RF applications. Detailed here is a selection of the most common ones, with maximum frequencies from 100 MHz to 110 GHz.

This table summarizes the maximum frequencies, compatibilities, and torque specifications for the connectors described below.

Connector	Max Frequency	Torque (in-pounds)	Compatibility
PL259/SO239	100 MHz	N/A	
Type F	3 GHz	15	
BNC	4 GHz	N/A	
FAKRA	6 GHz	N/A	
7/16 DIN	6 GHz	221	
N	11 GHz	15-20	
SMA	18 GHz	7-10	3.5mm, 2.92 mm
3.5 mm	26.5 GHz	7-10	SMA, 2.92 mm
2.92 mm	40 GHz	7-10	SMA, 3.5 mm
2.4 mm	50 GHz	7-10	1.85 mm
1.85 mm	67 GHz	7-10	2.4 mm
1.0 mm	110 GHz	7-10	

Table 1 - Connector Data



## RF Coaxial Connector Guide

### Connector Information

#### PL-259, SO-239 Connectors

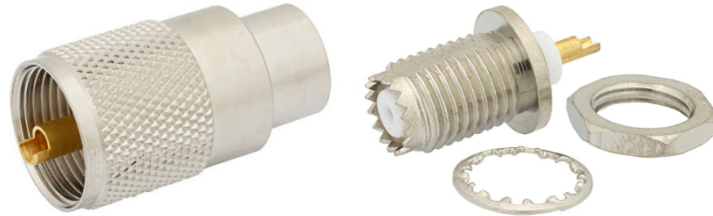


Figure 1 - PL259/SO239 Connectors (Photo Courtesy of Pasternack, [www.pasternack.com](http://www.pasternack.com))

These connectors are suitable for VHF applications up to about 100 MHz. There are no formal mechanical specifications for this connector and is no longer recommended for use and is mentioned here for historical reasons only. The PL-259 is male and the mating female connector is the SO-239.

#### F Connector



Figure 2 - Female and Male 75 Ohm F Connectors

The F connector is a 75Ω connector used extensively in the cable TV industry. It can be used up to 3 GHz. The male connector is extremely easy to assemble onto an RG59 cable. The cable is stripped back, and the connector crimped on. The protruding center conductor of the cable serves as the center pin of the connector. The torque specification is 15 in-pounds.



---

## RF Coaxial Connector Guide

---

### BNC Connector



Figure 3 - BNC Connector

The BNC (Bayonet Neill-Concelmann) connector is usable up to 4 GHz. The connector can operate to about 11 GHz, but there will be significant radiation from the open slots on the side. The bayonet locking feature makes for fast and easy connections, but the repeatability is not good due to loose mechanical tolerances. BNC connectors are available in 50 and 75 ohms.

### FAKRA Connector



Figure 4- FAKRA Connector (Courtesy of Pasternack [www.pasternack.com](http://www.pasternack.com))

The FAKRA connector is generally used in automotive applications. These connectors may be used up to 6 GHz.



---

## RF Coaxial Connector Guide

---

### 7/16 DIN Connector



Figure 5- 7/16 DIN Connector (Courtesy Pasternack, [www.pasternack.com](http://www.pasternack.com))

The 7/16 DIN connector is most often used in land mobile radio applications. It has a higher voltage breakdown than the N connector – 2,700 vs 500 VRMS – making it highly suitable for high RF power connections. The connector may be used up to 7.5 GHz. The torque specification is 221 in-pounds for field use, but 20 in-pounds may be used for lab testing.

### N Connector

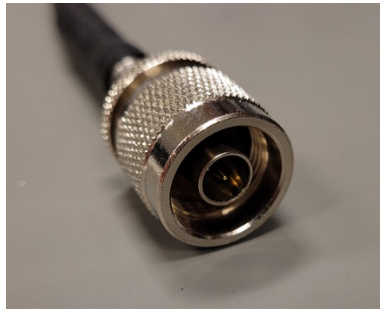


Figure 6 - Male Type N Connector

The N connector may be used up to 11 GHz, and with certain manufacturing enhancements, up to 18 GHz. The connector comes with knurling for hand tightening and a hex configuration for wrench tightening. The torque specification is 15 to 20 inch-pounds.



## RF Coaxial Connector Guide

### SMA Connector



Figure 7 - Male SMA Connector

The SMA connector will operate mode-free up to 18 GHz, with some enhanced versions working to 26.5 GHz. The PTFE dielectric is clearly visible here, which differentiates it from the higher performance 3.5 mm connector. The torque specification is 7-10 inch-pounds for the stainless-steel shell and 3-5 inch-pounds for brass.

### 3.5 mm Connector



Figure 8 - 3.5 mm Connector (Bottom)

The 3.5 mm connector is an air dielectric connector with mode-free operation up to 26.5 GHz, compared to the PTFE dielectric SMA connector, which are both pictured in Figure 8 above. The 3.5 mm (and SMA) is mechanically compatible with the 2.92 mm connector. The torque specification is 7-10 inch-pounds.





## RF Coaxial Connector Guide

### 2.92 mm Connector

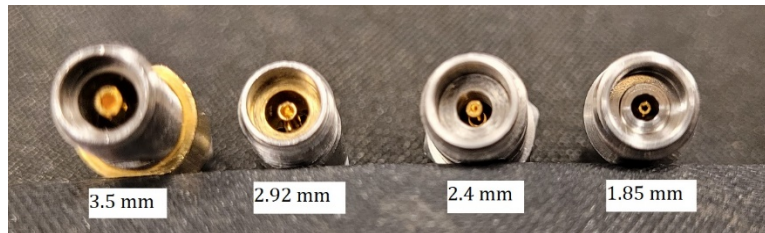


Figure 9- 3.5 mm to 1.85 mm Connectors

The 2.92 mm connector is an air dielectric connector which will operate up to 40 GHz and is mechanically compatible with the 3.5 mm connector. The torque specification is 7-10 inch-pounds.

### 2.4 mm Connector

The 2.4 mm connector is rated to 50 GHz. It is mechanically compatible with the 1.85 mm connector, but not 2.92- or 3.5-mm. The torque specification is 7-10 inch-pounds.

### 1.85 mm Connector

The 1.85 mm connector is rated to 67 GHz. It is mechanically compatible with the 2.4 mm connector. The torque specification is 7-10 inch-pounds.





---

## RF Coaxial Connector Guide

---

### 1 mm Connector



Figure 10- 1 mm Connector ([Model 2421-01SF Southwest Microwave](#))

The 1 mm connector is presently the highest frequency coaxial connector available and will operate up to 110 GHz. This is a very fragile and costly connector. The torque specification is 7-10 inch-pounds.