

Calibration Kits



COPPER MOUNTAIN®
TECHNOLOGIES



Copper Mountain Technologies offers calibration kits and Automatic Calibration Modules (ACMs) in multiple configurations from DC to 110 GHz, ensuring accurate testing with our VNAs.

EXTEND YOUR REACH™

USA/Canada: +1.317.222.5400
EMEA: +44 75 03 68 21 13

631 E. New York St | Indianapolis, IN | 46202
www.coppermountaintech.com

APAC: +65.6323.6546
Latin America: +1.954.706.5920

CMT Automatic Calibration Modules

Copper Mountain Technologies' Automatic Calibration Modules (ACMs) are designed for n-port calibrations of vector network analyzers (VNA) produced by Copper Mountain Technologies.

Copper Mountain Technologies' VNAs have a built-in function of one-touch automatic calibration performed with these ACMs. The ACM calibrates the VNA in fully automatic mode through the built-in functions of the analyzer software. The ACM switches to the impedance states one by one in the process of calibration. The VNA calibration coefficients are calculated using the measured S-parameters of the ACM impedance states and the data stored in the ACM memory.

Advantages of Automatic Calibration

The ACM calibration offers the following advantages over traditional mechanical SOLT calibration:

- reduced number of connections (for example, full two-port calibration requires only one connection of the ACM to a VNA instead of 7 connections of mechanical standards)
- faster calibration procedure
- reduced risk of human error
- higher accuracy
- reduced wear on test port connectors

User-Defined Characterization

Besides factory characterization, the ACM memory can store up to three user characterizations. The user characterization allows use of the ACM with adapters and other fixtures connected.

Attenuator state

The ACM features an additional attenuator state, which is not used in calibration. The attenuator is applied in confidence check of the performed calibration using a specific VNA function, which compares the measured S-parameters of the attenuator and the ACM memory data.

Thermal Compensation

Thermal compensation is used to enhance ACM calibration accuracy in the entire range of the operating temperatures of 64°F to 82°F (18°C to 28°C). It is a software function of correcting the ACM characterization data for ambient temperature variations. Temperature dependence of S-parameters of each ACM is determined at the factory and saved into the device memory.

ACM2708 Automatic Calibration Module¹

Measurement Range

Impedance	75 Ohm
Number of ports	2
Frequency range	20 kHz to 8 GHz
Number of characterization points	up to 1601

Hardware Configurations

Model	Connector type	
	Port A	Port B
ACM2708 - 511	type N 75, female	type N 75, female
ACM2708 - 512	type N 75, male	type N 75, female

Effective System Data ^{2,3}

20 kHz to 1 MHz	
Directivity	36 dB
Source match	32 dB
Load match	36 dB
Reflection tracking	0.15 dB
Transmission tracking	0.15 dB
1 MHz to 4 GHz	
Directivity	42 dB
Source match	39 dB
Load match	42 dB
Reflection tracking	0.10 dB
Transmission tracking	0.10 dB
4 GHz to 8 GHz	
Directivity	36 dB
Source match	30 dB
Load match	33 dB
Reflection tracking	0.10 dB
Transmission tracking	0.10 dB

Port Input

Max power	0 dBm
Max DC voltage ⁴	10 V
Damage level ⁵	+18 dBm
Damage DC voltage ⁵	35 V



Interface & Power

Interface	USB 2.0
Connector type	Mini USB B
Support standard	USBTMC-USB488
Power consumption	0.2 W

Dimensions

Length	without protective housing	115 mm
	with protective housing	115 mm
Width	without protective housing	40 mm
	with protective housing	95 mm
Height	without protective housing	25 mm
	with protective housing	28 mm
Weight		0.35 kg (12 oz)
Weight of protective housing		0.14 kg (5 oz)

Environmental Specifications

Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

[1] All specifications subject to change without notice. [2] VNA maximum effective parameters after calibration. [3] All parameters are determined in the temperature range of 23±5 °C with the temperature variation after calibration of no more than ±1 °C and output power of -5 dBm output. [4] Exceeding max values reduces VNA measurement accuracy. [5] Exceeding limit values results in ACM failure. © Copper Mountain Technologies - www.coppermountaintech.com - Rev. 202103

ACM2506 Automatic Calibration Module¹

The ACM contains two RF connectors for connection to VNA test ports, Mini-USB B control port, several different transmission and reflection impedance states and electronic changeover switches. ACM2506 has six reflection states (three for each port) and a Thru. The precise S-parameters of the calibration impedance states are stored in the ACM memory (factory characterization data).

Measurement Range

Impedance	50 Ohm
Number of ports	2
Frequency range	20 kHz to 6.5 GHz
Number of characterization points	up to 1601

Hardware Configurations

Model	Connector type	
	Port A	Port B
ACM2506 - 011	type N, female	type N, female
ACM2506 - 012	type N, male	type N, female
ACM2506 - 111	3.5 mm, female	3.5 mm, female
ACM2506 - 112	3.5 mm, male	3.5 mm, female

Effective System Data^{2,3}

20 kHz to 1 MHz	
Directivity	36 dB
Source match	32 dB
Load match	36 dB
Reflection tracking	0.15 dB
Transmission tracking	0.15 dB
1 MHz to 6.5 GHz	
Directivity	46 dB
Source match	40 dB
Load match	46 dB
Reflection tracking	0.04 dB
Transmission tracking	0.06 dB

Port Input

Max power	0 dBm
Max DC voltage⁴	10 V
Damage level⁵	+18 dBm
Damage DC voltage⁵	35 V



Interface & Power

Interface	USB 2.0
Connector type	Mini USB B
Support standard	USBTMC-USB488
Power consumption	0.2 W

Dimensions

Length	
without protective housing	115 mm
with protective housing	115 mm
Width	
without protective housing	40 mm
with protective housing	95 mm
Height	
without protective housing	25 mm
with protective housing	28 mm
Weight	0.35 kg (12 oz)
Weight of protective housing	0.14 kg (5 oz)

Environmental Specifications

Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

[1] All specifications subject to change without notice. [2] VNA maximum effective parameters after calibration. [3] All parameters are determined in the temperature range of 23±5 °C with the temperature variation after calibration of no more than ±1 °C and output power of -5 dBm output. [4] Exceeding max values reduces VNA measurement accuracy. [5] Exceeding limit values results in ACM failure. Rev. 2021Q2

ACM2509 Automatic Calibration Module¹

The ACM contains two RF connectors for connection to VNA test ports, Mini-USB control port, several different transmission and reflection impedance states and electronic changeover switches. ACM2509 has six reflection states (three for each port) and a Thru. The precise S-parameters of the calibration impedance states are stored in the ACM memory (factory characterization data).

Measurement Range

Impedance	50 Ohm
Number of ports	2
Frequency range	20 kHz to 9 GHz
Number of characterization points	up to 1601

Hardware Configurations

Model	Connector type	
	Port A	Port B
ACM2509 - 011	type N, female	type N, female
ACM2509 - 012	type N, male	type N, female
ACM2509 - 111	3.5 mm, female	3.5 mm, female
ACM2509 - 112	3.5 mm, male	3.5 mm, female

Effective System Data^{2,3}

20 kHz to 1 MHz	
Directivity	36 dB
Source match	32 dB
Load match	36 dB
Reflection tracking	0.15 dB
Transmission tracking	0.15 dB
1 MHz to 9 GHz	
Directivity	46 dB
Source match	40 dB
Load match	46 dB
Reflection tracking	0.04 dB
Transmission tracking	0.06 dB

Port Input

Max power	0 dBm
Max DC voltage ⁴	10 V
Damage level ⁵	+18 dBm
Damage DC voltage ⁵	35 V



Interface & Power

Interface	USB 2.0
Connector type	Mini USB
Support standard	USBTMC-USB488
Power consumption	0.2 W

Dimensions

Length	
without protective housing	115 mm
with protective housing	115 mm
Width	
without protective housing	40 mm
with protective housing	95 mm
Height	
without protective housing	25 mm
with protective housing	28 mm
Weight	0.35 kg (12 oz)
Weight of protective housing	0.14 kg (5 oz)

Environmental Specifications

Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

[1] All specifications subject to change without notice. [2] VNA maximum effective parameters after calibration. [3] All parameters are determined in the temperature range of 23±5 °C with the temperature variation after calibration of no more than ±1 °C and output power of -5 dBm output. [4] Exceeding max values reduces VNA measurement accuracy. [5] Exceeding limit values results in ACM failure. Rev. 2021Q2

ACM2520 Automatic Calibration Module¹

The ACM contains two RF connectors for connection to VNA test ports, USB Type B (female) control port, several different transmission and reflection impedance states and electronic changeover switches. ACM2520 has eight reflection states (four for each port) and a Thru. The precise S-parameters of the calibration impedance states are stored in the ACM memory (factory characterization data).



Measurement Range

Impedance	50 Ohm
Number of ports	2
Frequency range	100 kHz to 20 GHz*
Number of characterization points	up to 1601

Hardware Configurations

Model	Connector type	
	Port A	Port B
ACM2520 - 011	type N, female	type N, female
ACM2520 - 012	type N, male	type N, female
ACM2520 - 111	3.5 mm, female	3.5 mm, female
ACM2520 - 112	3.5 mm, male	3.5 mm, female

Effective System Data^{2,3}

100 kHz to 1 MHz	
Directivity	36 dB
Source match	32 dB
Load match	36 dB
Reflection tracking	0.15 dB
Transmission tracking	0.15 dB
1 MHz to 10 GHz	
Directivity	47 dB
Source match	40 dB
Load match	47 dB
Reflection tracking	0.04 dB
Transmission tracking	0.06 dB
10 GHz to 20 GHz	
Directivity	40 dB
Source match	36 dB
Load match	40 dB
Reflection tracking	0.10 dB
Transmission tracking	0.10 dB

Port Input

Max power	0 dBm
Max DC voltage ⁴	10 V
Damage level ⁵	+18 dBm
Damage DC voltage ⁵	35 V

Interface & Power

Interface	USB 2.0
Connector type	USB B
Support standard	USBTMC-USB488
Power consumption	0.25 W

Dimensions

Length	
without protective housing	107 mm
with protective housing	107 mm
Width	
without protective housing	55 mm
with protective housing	130 mm
Height	
without protective housing	27 mm
with protective housing	28 mm
Weight	0.435 kg (15 oz)
Weight of protective housing	0.14 kg (5 oz)

Environmental Specifications

Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

*All N-type models are only operational up to 18 GHz instead of 20 GHz. [1] All specifications subject to change without notice. [2] VNA maximum effective parameters after calibration. [3] All parameters are determined in the temperature range of 23±5 °C with the temperature variation after calibration of no more than ±1 °C and output power of -5 dBm output. [4] Exceeding max values reduces VNA measurement accuracy. [5] Exceeding limit values results in ACM failure. Rev. 2021Q2

ACM2543 Automatic Calibration Module¹

Measurement Range

Impedance	50 Ohm
Number of ports	2
Frequency range	10 MHz to 44 GHz*
Number of characterization points	up to 1601

Hardware Configurations

Model	Connector type	
	Port A	Port B
ACM2543 - 711	2.4 mm, female	2.4 mm, female
ACM2543 - 712	2.4 mm, male	2.4 mm, female

Effective System Data^{2,3}

10 MHz to 18 GHz	
Directivity	42 dB
Source match	38 dB
Load match	38 dB
Reflection tracking	0.10 dB
Transmission tracking	0.10 dB
18 GHz to 26.5 GHz	
Directivity	40 dB
Source match	34 dB
Load match	34 dB
Reflection tracking	0.15 dB
Transmission tracking	0.15 dB
26.5 GHz to 40 GHz	
Directivity	38 dB
Source match	32 dB
Load match	32 dB
Reflection tracking	0.15 dB
Transmission tracking	0.15 dB
40 GHz to 44 GHz	
Directivity	34 dB
Source match	30 dB
Load match	30 dB
Reflection tracking	0.20 dB
Transmission tracking	0.20 dB

Port Input

Max power	0 dBm
Max DC voltage ⁴	10 V
Damage level ⁵	+18 dBm
Damage DC voltage ⁵	35 V



Interface & Power

Interface	USB 2.0
Connector type	Mini USB B
Support standard	USBTMC-USB488
Power consumption	0.40 W

Dimensions

Length	87 mm
Width	65 mm
Height	22 mm
Weight	0.200 kg (7 oz)

Environmental Specifications

Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

[1] All specifications subject to change without notice. [*] All 2.92 mm models are only operational up to 40 GHz instead of 44 GHz. [2] VNA maximum effective parameters after calibration. [3] All parameters are determined in the temperature range of 23±5 °C with the temperature variation after calibration of no more than ±1 °C and output power of -10 dBm output. [4] Exceeding max values reduces VNA measurement accuracy. [5] Exceeding limit values results in ACM failure. © Copper Mountain Technologies - www.coppermountaintech.com - Rev. 2021Q4

ACM4509 Automatic Calibration Module¹

The ACM contains four RF connectors for connection to VNA test ports, Mini-USB control port, several different transmission and reflection impedance states and electronic changeover switches. ACM4509 has 16 reflection states (four for each port) and Thru. The precise S-parameters of the calibration impedance states are stored in the ACM memory (factory characterization data).

Measurement Range

Impedance	50 Ohm
Number of ports	4
Frequency range	100 kHz to 9 GHz
Number of characterization points	up to 1601

Hardware Configurations

Model	Connector type	
	Port A/C	Port B/D
ACM4509 - 01111	type N, female	type N, female
ACM4509 - 01212	type N, male	type N, female
ACM4509 - 11111	3.5 mm, female	3.5 mm, female
ACM4509 - 11212	3.5 mm, male	3.5 mm, female

Effective System Data^{2,3}

100 kHz to 1 MHz		
Directivity		36 dB
Source match		32 dB
Load match		36 dB
Reflection tracking		0.15 dB
Transmission tracking		0.15 dB
1 MHz to 9 GHz		
Directivity		46 dB
Source match		40 dB
Load match		46 dB
Reflection tracking		0.04 dB
Transmission tracking		0.06 dB

Port Input

Max power	-5 dBm
Max DC voltage⁴	10 V
Damage level⁵	+18 dBm
Damage DC voltage⁵	35 V



Interface & Power

Interface	USB 2.0
Connector type	Mini USB
Support standard	USBTMC-USB488
Power consumption	0.6 W

Dimensions

Length		
	without protective housing	115 mm
	with protective housing	115 mm
Width		
	without protective housing	74 mm
	with protective housing	125 mm
Height		
	without protective housing	25 mm
	with protective housing	32 mm
Weight		0.55 kg (19 oz)
Weight of protective housing		0.14 kg (5 oz)

Environmental Specifications

Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

[1] All specifications subject to change without notice. [2] VNA maximum effective parameters after calibration. [3] All parameters are determined in the temperature range of 23±5 °C with the temperature variation after calibration of no more than ±1 °C and output power of -5 dBm output. [4] Exceeding max values reduces VNA measurement accuracy. [5] Exceeding limit values results in ACM failure. Rev. 2021Q2

ACM4520 Automatic Calibration Module

The ACM contains four RF connectors for connection to VNA test ports, USB Type B control port, several different transmission and reflection impedance states and electronic changeover switches. ACM4520 has 12 reflection states (three for each port) and a Thru. The precise S-parameters of the calibration impedance states are stored in the ACM memory (factory characterization data).

Measurement Range

Impedance	50 Ohm
Number of ports	4
Frequency range	100 kHz to 20 GHz*
Number of characterization points	up to 1601

Hardware Specifications

Model	Connector type	
	Port A/C	Port B/D
ACM4520 - 01111	type N, female	type N, female
ACM4520 - 01212	type N, male	type N, female
ACM4520 - 11111	3.5 mm, female	3.5 mm, female
ACM4520 - 11212	3.5 mm, male	3.5 mm, female

Effective System Data^{2,3}

100 kHz to 10 MHz	
Directivity	36 dB
Source match	32 dB
Load match	36 dB
Reflection tracking	0.15 dB
Transmission tracking	0.15 dB
10 MHz to 10 GHz	
Directivity	46 dB
Source match	40 dB
Load match	46 dB
Reflection tracking	0.04 dB
Transmission tracking	0.06 dB
10 GHz to 20 GHz	
Directivity	40 dB
Source match	36 dB
Load match	40 dB
Reflection tracking	0.10 dB
Transmission tracking	0.10 dB

Port Input

Max power	0 dBm
Max DC voltage⁴	10 V
Damage level⁵	+18 dBm
Damage DC voltage⁵	16 V

Environmental Specification

Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

Exceeding max values reduces VNA measurement accuracy. [5] Exceeding limit values results in ACM failure. Rev. 2021Q2



Interface and Power

Interface	USB 2.0
Connector type	USB B
Support standard	USBTMC-USB488
Power consumption	0.4 W

Dimensions

ACM4520 - 01111, ACM4520 - 01212	
Length	
without protective housing	110 mm
with protective housing	110 mm
Width	
without protective housing	89 mm
with protective housing	160 mm
Height	
without protective housing	27 mm
with protective housing	32 mm
Weight	0.9 kg (31.7 oz)
ACM4520 - 11111, ACM4520 - 11212	
Length	
without protective housing	98 mm
with protective housing	98 mm
Width	
without protective housing	89 mm
with protective housing	160 mm
Height	
without protective housing	27 mm
with protective housing	32 mm
Weight	0.8 kg (28.2 oz)
Weight of protective housing	0.14 kg (5 oz)

*All N-type models are only operational up to 18 GHz instead of 20 GHz. [1] All specifications subject to change without notice. [2] VNA maximum effective parameters after calibration. [3] All parameters are determined in the temperature range of 23±5 °C with the temperature variation after calibration of no more than ±1 °C and output power of -5 dBm output. [4]

N3.5 Calibration Kit

The N3.5 type N calibration kit is used to calibrate vector network analyzers up to 3.5 GHz for measurements of components with 50 Ω type N connectors.

Electrical Data

Impedance	50 Ω
Frequency range	DC to 3.5 GHz

Electrical Specifications*

Load	DC - 3.5 GHz
VSWR	≤ 1.035
Return loss	≥ 35.3 dB

Open	DC - 3.5 GHz
Phase Deviation	$\leq \pm 2^\circ$

Short	DC - 3.5 GHz
Phase Deviation	$\leq \pm 2^\circ$

*Phase deviation: relative tolerance from standard phase

Coefficients

	Male	Female
Open	$C_0 = 62.14 \times 10^{-15}$ F	$C_0 = 119.09 \times 10^{-15}$ F
	$C_1 = -143.07 \times 10^{-27}$ F/Hz	$C_1 = -36.955 \times 10^{-27}$ F/Hz
	$C_2 = 82.92 \times 10^{-36}$ F/Hz ²	$C_2 = 26.258 \times 10^{-36}$ F/Hz ²
	$C_3 = 0.76 \times 10^{-45}$ F/Hz ³	$C_3 = 5.5136 \times 10^{-45}$ F/Hz ³
Offset delay	17.411 ps	0 ps
Offset Z0	50	50
Offset loss	700 M Ω /s	700 M Ω /s
Short		
Offset delay	17.817 ps	93 fs
Offset Z0	50.209	49.992 Ω
Offset loss	2.1002G Ω /s	700 M Ω /s
Female-Female Thru		
Offset delay	60.5 ps	
Offset loss	700 M Ω /s	
Male-Male Thru		
Offset delay	128.64 ps	
Offset loss	700 M Ω /s	



N1801 Calibration Kit

Electrical Data

Impedance	50Ω
Frequency range	DC to 18 GHz
Connector type	N-type

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	1.10 Nm
Gauge	5.22 mm to 5.26 mm

Short	Phase Error ²
DC - 6 GHz	≤ 1.5°
6 GHz - 9 GHz	≤ 2°
9 GHz - 18 GHz	≤ 3.5°

Load	
Resistance	50Ω ± 0.5Ω
Return Loss	
DC - 6 GHz	≥ 42 dB
6 GHz - 9 GHz	≥ 36 dB
9 GHz - 18 GHz	≥ 30 dB
Power Handling	≤ 1.0 W

Thru	
Electrical (Offset) delay	152.105 ps
Return loss	
DC - 6 GHz	≥ 40 dB
6 GHz - 9 GHz	≥ 36 dB
9 GHz - 18 GHz	≥ 32 dB

Mechanical Data

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	1.10 Nm
Gauge	5.22 mm to 5.26 mm

Environmental Data

Operating temperature ³	20°C to 26°C
Storage temperature	-40°C to +85°C



Coefficients

Open	$C_0 = 37.1 \times 10^{-15} \text{ F}$	
	$C_1 = 1200 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = -30 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = 0.0 \times 10^{-45} \text{ F/Hz}^3$	
	Electrical (Offset) delay	40.028 ps
	Electrical (Offset) loss	0.80 GΩ/s
Short	$L_0 = 95 \times 10^{-12} \text{ H}$	
	$L_1 = -9900 \times 10^{-24} \text{ H/Hz}$	
	$L_2 = 980 \times 10^{-33} \text{ H/Hz}^2$	
	$L_3 = -29 \times 10^{-42} \text{ H/Hz}^3$	
	Electrical (Offset) delay	40.028 ps
	Electrical (Offset) loss	0.80 GΩ/s
Load	Electrical (Offset) delay	0.0 ps
	Electrical (Offset) loss	0.0 GΩ/s
Thru	Electrical (Offset) delay	152.105 ps
	Electrical (Offset) loss	2.2 GΩ/s

¹ The nominal phase is defined by the Offset Delay, the Offset Loss, and the Fringing Capacitances

² The nominal phase is defined by the Offset Delay, the Offset Loss, and the Short Inductant

³ Temperature range over which these specifications are valid

N1802 Calibration Kit

Electrical Data

Impedance	50Ω
Frequency range	DC to 18 GHz
Connector type	N-type

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	1.10 Nm
Gauge	5.28 mm to 5.32 mm

Open	Phase Error ¹
DC - 6 GHz	≤ 2°
6 GHz - 9 GHz	≤ 3°
9 GHz - 18 GHz	≤ 4°

Short	Phase Error ²
DC - 6 GHz	≤ 1.5°
6 GHz - 9 GHz	≤ 2°
9 GHz - 18 GHz	≤ 2.5°

Load	
Resistance	50Ω ± 0.5Ω
Return Loss	
DC - 6 GHz	≥ 42 dB
6 GHz - 9 GHz	≥ 36 dB
9 GHz - 18 GHz	≥ 30 dB
Power Handling	≤ 1.0 W, derate by 0.01 W/K

Thru	
Return loss	
DC - 6 GHz	≥ 40 dB
6 GHz - 9 GHz	≥ 36 dB
9 GHz - 18 GHz	≥ 32 dB

Mechanical Data

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	1.10 Nm
Gauge	5.28 mm to 5.32 mm

Environmental Data

Operating temperature³	20°C to 26°C
Storage temperature	-40°C to +85°C

¹ The nominal phase is defined by the Offset Delay, the Offset Loss, and the Fringing Capacitances

² The nominal phase is defined by the Offset Delay, the Offset Loss, and the Short Inductant

³ Temperature range over which these specifications are valid



Coefficients

Open	$C_0 = -14.2000 \times 10^{-15} \text{ F}$	-14.2000 fF
	$C_1 = 400.000 \times 10^{-27} \text{ F/Hz}$	0.40000 fF/GHz
	$C_2 = -16.0000 \times 10^{-36} \text{ F/Hz}^2$	-0.01600 fF/GHz ²
	$C_3 = 1.00000 \times 10^{-45} \text{ F/Hz}^3$	0.00100 fF/GHz ³
	Electrical (Offset) delay	73.384 ps
	Electrical (Offset) loss	0.80 GΩ/s
Short	$L_0 = -27.0000 \times 10^{-12} \text{ H}$	-27.0000 pH
	$L_1 = 7200.00 \times 10^{-24} \text{ H/Hz}$	7.20000 pH/GHz
	$L_2 = -800 \times 10^{-33} \text{ H/Hz}^2$	-0.80000 pH/GHz ²
	$L_3 = 26.0000 \times 10^{-42} \text{ H/Hz}^3$	0.02600 pH/GHz ³
	Electrical (Offset) delay	73.384 ps
	Electrical (Offset) loss	0.80 GΩ/s
Load	Electrical (Offset) delay	0.0 ps
	Electrical (Offset) loss	0.0 GΩ/s
Thru	Electrical (Offset) delay	212.814 ps
	Electrical (Offset) loss	2.20 GΩ/s

N611 Calibration Kit

6 GHz N-type female calibration kit, includes a Thru standard

Electrical Data

Impedance	50Ω
Average Power	≤1W

Electrical Specifications*

Load	DC - 6 GHz
Return Loss	≤ -36 dB (VSWR ≤1.032)

Open	DC - 6 GHz
Phase Deviation	≤ ± 0.6°

Short	DC - 6 GHz
Phase Deviation	≤ ± 0.6°

Offset Loss	700 MΩ/s
Electrical Delay	83.0 ps

Mechanical Data

Mating Cycles	> 3000 times
Coupling torque	1.3 ~ 1.7 Nm
Open-end wrench size	19 mm

Environmental Data


Operating temperature	15°C to 35°C
Storage temperature	-40°C to 75°C



Coefficients

Open	$C_0 = 89.939 \times 10^{-15} \text{ F}$	
	$C_1 = 2536.8 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = -264.99 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = 13.4 \times 10^{-45} \text{ F/Hz}^3$	
	Offset delay	41.17 ps
	Offset Z0	50 Ω
	Offset loss	0.93 GΩ/s
Short	$L_0 = 3.3998 \times 10^{-12} \text{ F}$	
	$L_1 = -496.481 \times 10^{-24} \text{ F/Hz}$	
	$L_2 = 34.8314 \times 10^{-33} \text{ F/Hz}^2$	
	$L_3 = -0.7847 \times 10^{-42} \text{ F/Hz}^3$	
	Offset delay	45.955 ps
	Offset Z0	49.992 Ω
	Offset loss	1.087 GΩ/s

*Phase deviation: relative tolerance from standard phase

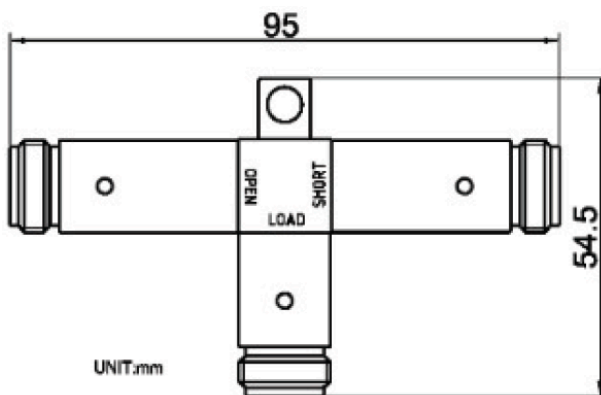

N612 Calibration Kit

6 GHz N-type male calibration kit, includes a Thru standard

Electrical Data

Impedance	50Ω
Average power	≤1W

Electrical Specifications*

Load	DC - 6 GHz
Return loss	≤ -36 dB (VSWR ≤1.032)

Open	DC - 6 GHz
Phase Deviation	≤ ±0.6°

Short	DC - 6 GHz
Phase Deviation	≤ ±0.6°

Offset Loss	700 MΩ/s
Electrical Delay	83.0 ps

Mechanical Data

Mating cycles	>3000 times
Coupling torque	1.3 ~ 1.7 Nm
Open-end wrench size	19 mm

Environmental Data


Operating temperature	15°C to 35°C
Storage temperature	-40°C to +75°C

*Phase deviation: relative tolerance from standard phase



Coefficients

Open	$C_0 = 89.939 \times 10^{-15} \text{ F}$	
	$C_1 = 2536.8 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = -264.99 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = 13.4 \times 10^{-45} \text{ F/Hz}^3$	
	Offset delay	40.869 ps
	Offset Z0	50 Ω
	Offset loss	0.93 GΩ/s
Short	$L_0 = 3.3998 \times 10^{-12} \text{ F}$	
	$L_1 = -496.481 \times 10^{-24} \text{ F/Hz}$	
	$L_2 = 34.8314 \times 10^{-33} \text{ F/Hz}^2$	
	$L_3 = -0.7847 \times 10^{-42} \text{ F/Hz}^3$	
	Offset delay	45.955 ps
	Offset Z0	49.99 Ω
	Offset loss	1.087 GΩ/s

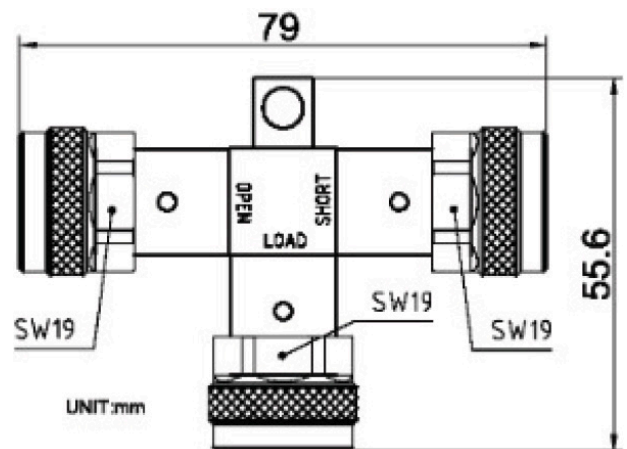

N911 Calibration Kit

9 GHz N-type female calibration kit, includes a Thru standard

Electrical Data

Impedance	50Ω
Average Power	≤1W

Electrical Specifications*

Load	DC - 9 GHz
Return Loss	≤ -36 dB (VSWR ≤1.032)

Open	DC - 9 GHz
Phase Deviation	≤ ± 0.8°

Short	DC - 9 GHz
Phase Deviation	≤ ± 0.8°

Offset Loss	700 MΩ/s
Electrical Delay	83.0 ps

Mechanical Data

Mating Cycles	> 3000 times
Coupling torque	1.3 ~ 1.7 Nm
Open-end wrench size	19 mm

Environmental Data


Operating temperature	15°C to 35°C
Storage temperature	-40°C to 75°C

*Phase deviation: relative tolerance from standard phase



Coefficients

Open	$C_0 = 89.939 \times 10^{-15} \text{ F}$	
	$C_1 = 2536.8 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = -264.99 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = 13.4 \times 10^{-45} \text{ F/Hz}^3$	
	Offset delay	41.17 ps
	Offset Z0	50 Ω
	Offset loss	0.93 GΩ/s
Short	$L_0 = 3.3998 \times 10^{-12} \text{ F}$	
	$L_1 = -496.481 \times 10^{-24} \text{ F/Hz}$	
	$L_2 = 34.8314 \times 10^{-33} \text{ F/Hz}^2$	
	$L_3 = -0.7847 \times 10^{-42} \text{ F/Hz}^3$	
	Offset delay	45.955 ps
	Offset Z0	49.992 Ω
	Offset loss	1.087 GΩ/s

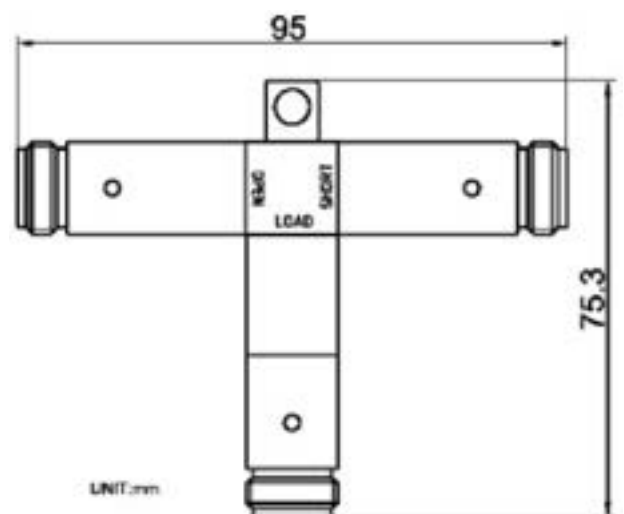

N912 Calibration Kit

9 GHz N-type male calibration kit, include Thru standard

Electrical Data

Impedance	50Ω
Average power	≤1W

Electrical Specifications*

Load	DC - 9 GHz
Return loss	≤ -36 dB (VSWR ≤1.032)

Open	DC - 9 GHz
Phase Deviation	≤ ±0.8°

Short	DC - 9 GHz
Phase Deviation	≤ ±0.8°

Offset Loss	700 MΩ/s
Electrical Delay	83.0 ps

Mechanical Data

Mating cycles	>3000 times
Coupling torque	1.3 ~ 1.7 Nm
Open-end wrench size	19 mm

Environmental Data


Operating temperature	15°C to 35°C
Storage temperature	-40°C to +75°C

*Phase deviation: relative tolerance from standard phase



Coefficients

Open	$C_0 = 89.939 \times 10^{-15} \text{ F}$	
	$C_1 = 2536.8 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = -264.99 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = 13.4 \times 10^{-45} \text{ F/Hz}^3$	
	Offset delay	40.869 ps
	Offset Z0	50 Ω
	Offset loss	0.93 GΩ/s
Short	$L_0 = 3.3998 \times 10^{-12} \text{ F}$	
	$L_1 = -496.481 \times 10^{-24} \text{ F/Hz}$	
	$L_2 = 34.8314 \times 10^{-33} \text{ F/Hz}^2$	
	$L_3 = -0.7847 \times 10^{-42} \text{ F/Hz}^3$	
	Offset delay	45.955 ps
	Offset Z0	49.99 Ω
	Offset loss	1.087 GΩ/s

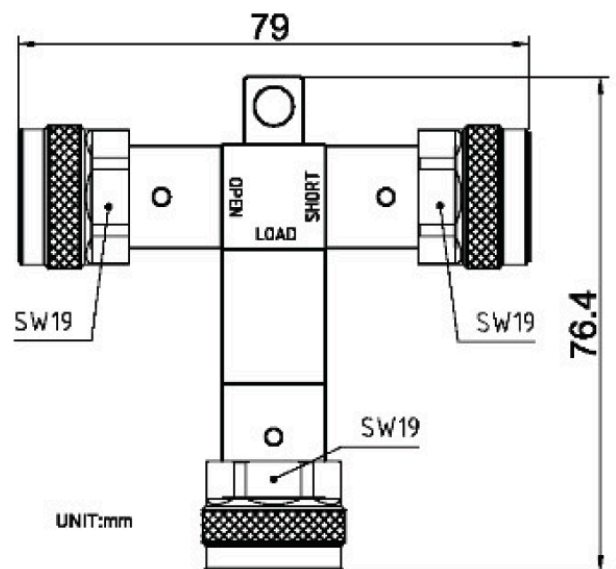

S911T Calibration Module

Electrical Data

Impedance	50Ω
Frequency range	DC to 9 GHz
Connector type	3.5 mm female

Open	Phase deviation, max.
DC - 4 GHz	$\leq 1.5^\circ$
4 GHz - 9 GHz	$\leq 3^\circ$

Short	Phase deviation, max.
DC - 4 GHz	$\leq 1^\circ$
4 GHz - 9 GHz	$\leq 2^\circ$

Load	
Resistance	$50\Omega \pm 0.5\Omega$
Return Loss	
DC - 4 GHz	≥ 37 dB
4 GHz - 9 GHz	≥ 34 dB
Power rating, max.	0.5 W

Thru	
Electrical (Offset) delay	127.588 ps
Return loss	
DC - 4 GHz	≥ 34 dB
4 GHz - 9 GHz	≥ 28 dB
Insertion loss	
DC - 9 GHz	0.11 dB

Environmental Data

Operating temperature	5°C to 40°C
Storage temperature	-40°C to +70°C



Coefficients

Open	$C_0 = -7.425 \times 10^{-15}$ F	
	$C_1 = 2470 \times 10^{-27}$ F/Hz	
	$C_2 = -226 \times 10^{-36}$ F/Hz ²	
	$C_3 = 6.18 \times 10^{-45}$ F/Hz ³	
	Offset delay	30.821 ps
	Offset length	9.24 mm
	Offset loss	2 GΩ/s
Short	$L_0 = 27.98 \times 10^{-12}$ H	
	$L_1 = -5010 \times 10^{-24}$ H/Hz	
	$L_2 = 303.8 \times 10^{-33}$ H/Hz ²	
	$L_3 = -6.13 \times 10^{-42}$ H/Hz ³	
	Offset delay	30.688 ps
	Offset length	9.2 mm
	Offset loss	2 GΩ/s
Thru	Electrical delay	127.588 ps
	Electrical length	38.25 mm
	Offset loss	2 GΩ/s

S2611 4-in-1 Calibration Kit*

Electrical Data

Impedance	50Ω
Frequency range	DC to 26.5 GHz
Connector type	3.5 mm female

Effective Parameters

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	0.90 Nm
Gauge	0.00 mm to 0.08 mm


Electrical Specifications

Open	Phase Error ¹
DC - 4 GHz	≤ 1°
4 GHz - 8 GHz	≤ 2°
8 GHz - 26.5 GHz	≤ 3°

Short	Phase Error ²
DC - 4 GHz	≤ 1°
4 GHz - 8 GHz	≤ 2°
8 GHz - 26.5 GHz	≤ 3°

Load	
Resistance	50Ω ± 0.5Ω
Return Loss	
DC - 4 GHz	≥ 40 dB
4 GHz - 8 GHz	≥ 35 dB
8 GHz - 26.5 GHz	≥ 30 dB
Power Handling	≤ 0.5 W

Thru	
Electrical (Offset) delay	84.058 ps
Return loss	
DC - 4 GHz	≥ 34 dB
4 GHz - 8 GHz	≥ 32 dB
8 GHz - 26.5 GHz	≥ 30 dB

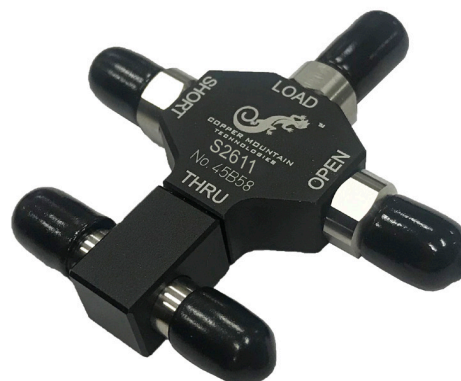

Coefficients

Open	$C_0 = -17.5 \times 10^{-15} \text{ F}$	
	$C_1 = -2000 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = 140 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = -2.7 \times 10^{-45} \text{ F/Hz}^3$	
	Electrical (Offset) delay	33.356 ps
	Electrical (Offset) loss	2.2 GΩ/s
Short	$L_0 = -44 \times 10^{-12} \text{ H}$	
	$L_1 = 3700 \times 10^{-24} \text{ H/Hz}$	
	$L_2 = -250 \times 10^{-33} \text{ H/Hz}^2$	
	$L_3 = 5 \times 10^{-42} \text{ H/Hz}^3$	
	Electrical (Offset) delay	33.356 ps
	Electrical (Offset) loss	2.36 GΩ/s
Load	Electrical (Offset) delay	0.0 ps
	Electrical (Offset) loss	0.0 GΩ/s
Thru	Electrical (Offset) delay	84.058 ps
	Electrical (Offset) loss	2.51 GΩ/s

Environmental Data

Operating temperature³	20°C to 26°C
Storage temperature⁴	-40°C to +85°C

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances. ² The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance. ³ Temperature range over which these specifications are valid. ⁴ This range is underneath and above the operating temperature range, within the calibration kit is fully functional and could be used without damage.

*Specifications are subject to change without notice.

F7511 Calibration Kit

The F7511 is a 75Ω, 3 GHz, F-type calibration kit containing F-male and F-female open, short, load and an F-female adapter.

Electrical Data

Impedance	75Ω
Frequency range	DC to 3 GHz

Electrical Specifications*

Load	DC - 1 GHz	1 GHz to 3 GHz
Return loss	≥ 38 dB	≥ 36 dB
Open	DC - 1 GHz	1 GHz to 3 GHz
Phase Deviation	$\leq \pm 1^\circ$	$\leq \pm 2^\circ$
Short	DC - 1 GHz	1 GHz to 3 GHz
Phase Deviation	$\leq \pm 1^\circ$	$\leq \pm 2^\circ$
Thru	DC - 1 GHz	1 GHz to 3 GHz
Offset Loss	1.13 GΩ/s	1.13 GΩ/s
Electrical Delay	136.6 ps	136.6 ps
Return Loss	≥ 40 dB	≥ 30 dB

Coefficients

Open	$C_0 = 42.945 \times 10^{-16}$ F
	$C_1 = 98.367 \times 10^{-27}$ F/Hz
	$C_2 = 706.93 \times 10^{-36}$ F/Hz ²
	$C_3 = -114.957 \times 10^{-45}$ F/Hz ³
Offset delay	53.6 ps
Offset Z0	75
Offset loss	1.64 GΩ/s
Short	
Offset delay	57 ps
Offset Z0	75
Offset loss	1.8 GΩ/s
Thru	
Offset delay	136.6 ps
Offset loss	1.13 GΩ/s



T4311 Calibration Kit

Electrical Data

Impedance	50Ω
Frequency range	DC to 40 GHz
Connector type	2.92 mm female

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	0.90 Nm
Gauge	0.00 mm to 0.08 mm

Short	Phase Error ²
DC - 4 GHz	≤ 1.5°
4 GHz - 26.5 GHz	≤ 4°
26.5 GHz - 40 GHz	≤ 5°

Load	
Resistance	50Ω ± 0.5Ω
Return Loss	
DC - 4 GHz	≥ 40 dB
4 GHz - 26.5 GHz	≥ 28 dB
26.5 GHz - 40 GHz	≥ 25 dB
Power Handling	≤ 0.5 W

Thru	
Electrical (Offset) delay	65.712 ps
Return loss	
DC - 4 GHz	≥ 32 dB
4 GHz - 26.5 GHz	≥ 30 dB
26.5 GHz - 40 GHz	≥ 28 dB

Mechanical Data

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	0.90 Nm
Gauge	0.00 mm to 0.08 mm

Environmental Data

Operating temperature ³	20°C to 26°C
Storage temperature	-40°C to +85°C



Coefficients

Open	$C_0 = -4.3 \times 10^{-15} \text{ F}$	
	$C_1 = 431 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = -11.5 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = 0.12 \times 10^{-45} \text{ F/Hz}^3$	
	Electrical (Offset) delay	28.353 ps
	Electrical (Offset) loss	2.4 GΩ/s
Short	$L_0 = 0 \times 10^{-12} \text{ H}$	
	$L_1 = 0 \times 10^{-24} \text{ H/Hz}$	
	$L_2 = 0 \times 10^{-33} \text{ H/Hz}^2$	
	$L_3 = 0 \times 10^{-42} \text{ H/Hz}^3$	
	Electrical (Offset) delay	28.353 ps
	Electrical (Offset) loss	2.4 GΩ/s
Load	Electrical (Offset) delay	0.0 ps
	Electrical (Offset) loss	0.0 GΩ/s
Thru	Electrical (Offset) delay	65.712 ps
	Electrical (Offset) loss	2.7 GΩ/s

¹ The nominal phase is defined by the Offset Delay, the Offset Loss, and the Fringing Capacitances

² The nominal phase is defined by the Offset Delay, the Offset Loss, and the Short Inductant

³ Temperature range over which these specifications are valid

Z5411 Calibration Kit

The Z5411 is a 50Ω, 50 GHz, 2.4 mm calibration kit.

Electrical Data

Impedance	50Ω
Frequency range	DC to 50 GHz
Open	Phase Error ¹
DC - 4 GHz	≤ 2°
4 GHz - 26.5 GHz	≤ 4°
26.5 GHz - 50 GHz	≤ 6°
Short	Phase Error ²
DC - 4 GHz	≤ 1.5°
4 GHz - 26.5 GHz	≤ 3°
26.5 GHz - 50 GHz	≤ 4.5°
Load	
Resistance	50Ω + 0.5Ω
Return Loss	
DC - 4 GHz	≥ 36 dB
4 GHz - 26.5 GHz	≥ 30 dB
26.5 GHz - 50 GHz	≥ 22 dB
Power Handling	≤ 0.5 W
Thru	
Electrical (Offset) delay	87.394 ps
Return loss	
DC - 4 GHz	> 30 dB
4 GHz - 26.5 GHz	≥ 24 dB
26.5 GHz - 50 GHz	≥ 17 dB

Mechanical Data

Connector Type	2.4 mm
Mating cycles	≥ 500
Maximum torque	1.65 Nm
Recommended torque	0.90 Nm
Gauge	0.00 mm to 0.05 mm

Environmental Data

Operating temperature³	20°C to 26°C
Storage temperature	-40°C to +85°C



Coefficients

Open	$C_0 = 4.3 \times 10^{-15} \text{ F}$	
	$C_1 = -718 \times 10^{-27} \text{ F/Hz}$	
	$C_2 = 28.7 \times 10^{-36} \text{ F/Hz}^2$	
	$C_3 = -0.3 \times 10^{-45} \text{ F/Hz}^3$	
	Electrical (Offset) delay	23.350 ps
	Electrical (Offset) loss	3.2 GΩ/s
Short	$L_0 = 4 \times 10^{-12} \text{ H}$	
	$L_1 = 0 \times 10^{-24} \text{ H/Hz}$	
	$L_2 = 0 \times 10^{-33} \text{ H/Hz}^2$	
	$L_3 = 0 \times 10^{-42} \text{ H/Hz}^3$	
	Electrical (Offset) delay	23.350 ps
	Electrical (Offset) loss	3.5 GΩ/s
Load	Electrical (Offset) delay	0.0 ps
	Electrical (Offset) loss	0.0 GΩ/s
Thru	Electrical (Offset) delay	87.394 ps
	Electrical (Offset) loss	4.0 GΩ/s

[1] The nominal phase is defined by the Offset Delay, the Offset Loss, and the Fringing Capacitances. [2] The nominal phase is defined by the Offset Delay, the Offset Loss, and the Short Inductant. [3] Temperature range over which these specifications are valid. © Copper Mountain Technologies - www.coppermountaintech.com - Rev. 2018Q2

Waveguide Calibration Kits

WR-15 Calibration Kit

WR-12 Calibration Kit

WR-10 Calibration Kit

Operating Frequency Range	50 GHz to 75 GHz	60 GHz to 90 GHz	75 GHz to 110 GHz
Fixed Load VSWR	1.06:1 (Max)	1.06:1 (Max)	1.065:1 (Max)
Fixed Load Power Handling	0.2 Watts (Max)	0.2 Watts (Max)	0.2 Watts (Max)
Included Hardware Quantity	11	11	11
Waveguide Material	Beryllium Copper (BeCu)	Beryllium Copper (BeCu)	Beryllium Copper (BeCu)
Waveguide Finish	Gold Plated, MIL-G-45204 or ASTM B488	Gold Plated, MIL-G-45204 or ASTM B488	Gold Plated, MIL-G-45204 or ASTM B488
Size	214 mm x 172 mm x 98 mm	214 mm x 172 mm x 98 mm	214 mm x 172 mm x 98 mm
Metrology Fixed Short	1 Piece	1 Piece	1 Piece
Metrology Fixed Waveguide Load	1 Piece	1 Piece	1 Piece
Metrology 1/8 Wavelength Offset	1 Piece	1 Piece	1 Piece
Metrology 1/4 Wavelength Offset	1 Piece	1 Piece	1 Piece
Metrology 3/8 Wavelength Offset	1 Piece	1 Piece	1 Piece
Waveguide Quick Connect, 0.75" Diameter Flange	2 Pieces	2 Pieces	2 Pieces
Waveguide Screws, 3/32 Hex Head	1 Bag (10 Pieces)	1 Bag (10 Pieces)	1 Bag (10 Pieces)
Extended Waveguide Screws, 3/32 Hex Head	6 Pieces	6 Pieces	6 Pieces
Alignment Dowel Pin	4 Pieces	4 Pieces	4 Pieces
Waveguide Screwdriver, 3/32 Hex Head	1 Piece	1 Piece	1 Piece
Calibration Data, USB Driver	1 Piece	1 Piece	1 Piece



Compatibility Comparison Chart

ACM Calibration Kits:

	ACM2708	ACM2506 ¹	ACM2509 ¹	ACM2520 ¹	ACM2543	ACM4509 ²
1-Port USB VNAs						
R60						
R140B						
R180						
Compact USB VNAs						
M5045						
M5065						
M5090						
M5180						
S5045						
S7530						
S5065						
S5085						
S5180B						
S5243						
TR1300/1						
SC5065						
SC5090						
SC7540						
Multiport USB VNAs						
SN5090-XX						
Cobalt USB VNAs						
C1209						
C2209						
C4209						
C1409						
C2409						
C4409						
C1220						
C2220						
C4220						
C1420						
C2420						
C4420						

¹Except below the lower limit of 20 kHz (for ACM2506, ACM2509, ACM2520)

²Except below the lower limit of 100 kHz (for ACM4509, ACM4520)

Compatibility Comparison Chart

Mechanical Calibration Kits:

	N3.5	N1801	N1802	N611	N612	N911	N912	S911T	S2611	F7511	T4311	Z5411	WR-15	WR-12	WR-10	WR-08	WR-06
1-Port USB VNAs																	
R60																	
R140B																	
R180																	
Compact USB VNAs																	
M5045																	
M5065																	
M5090																	
M5180																	
S5045																	
S7530																	
S5065																	
S5085																	
S5180B																	
S5243																	
TR1300/1																	
SC5065																	
SC5090																	
SC7540																	
Multiport USB VNAs																	
SN5090-XX																	
Cobalt USB VNAs																	
C1209																	
C2209																	
C4209																	
C1409																	
C2409																	
C4409																	
C1220																	
C2220																	
C4220																	
C1420																	
C2420																	
C4420																	
CobaltFx Frequency Extension Modules																	
FET1854																	
FET-WR15																	
FET-WR15-HP																	
FET-WR12																	
FET-WR12-HP																	
FET-WR10																	
FET-WR10-HP																	
FET-WR08																	
FET-WR06																	

Technology is supposed to move. It's supposed to change and update and progress. It's not meant to sit stagnant year after year simply because that's how things have always been done.

The engineers at Copper Mountain Technologies are creative problem solvers. They know the people using VNAs don't just need one giant machine in a lab. They know that VNAs are needed in the field, requiring portability and flexibility. Data needs to be quickly transferred, and a test setup needs to be easily automated and recalled for various applications. The engineers at Copper Mountain Technologies are rethinking the way VNAs are developed and used.

Copper Mountain Technologies' VNAs are designed to work with the Windows or Linux PC you already use via USB interface. After installing the test software, you have a top-quality VNA at a fraction of the cost of a traditional analyzer. The result is a faster, more effective test process that fits into the modern workspace. This is the creativity that makes Copper Mountain Technologies stand out above the crowd.

We're creative. We're problem solvers.



631 E. New York St | Indianapolis, IN | 46202
www.coppermountaintech.com

USA/Canada: +1.317.222.5400
APAC: +65.6323.6546
Latin America: +1.954.706.5920
EMEA: +44 75 03 68 21 13