

# 1-Port USB VNA - R60

## Extended Specifications



COPPER MOUNTAIN®  
TECHNOLOGIES



- **Patent US 9,291,657** - No test cable needed
- **Frequency range:** 1 MHz - 6 GHz
- **Measurement time per point:** 100  $\mu$ s min typ.
- **Automation programming** in LabView, Python, MATLAB, .NET, etc.
- Up to **100,001 measurement points**
- **Time domain and gating** included standard

## EXTEND YOUR REACH™

USA: +1.317.222.5400  
London: +44 75 03 68 21 13

631 E. New York St | Indianapolis, IN | 46202  
[www.coppermountaintech.com](http://www.coppermountaintech.com)

Singapore: +65.6323.6546  
Latin America: +1.954.706.5920

# Specifications<sup>1</sup>

## Measurement Range

Impedance	50 Ohm
Test port connector	type N, male
Number of test ports	1
Frequency range	1 MHz to 6 GHz
Full frequency accuracy	$\pm 2.5 \cdot 10^{-6}$
Frequency resolution	20 Hz
Number of measurement points	2 to 100,001
Measurement bandwidths (with 1/3 steps)	10 Hz to 100 kHz
Cable loss measurement range	35 dB
Dynamic range <sup>2</sup>	109 dB typ.

## Measurement Accuracy<sup>3</sup>

Accuracy of reflection measurements <sup>4</sup>	Magnitude / Phase
-15 dB to 0 dB	$\pm 0.4$ dB / $\pm 3^\circ$
-25 dB to -15 dB	$\pm 1.0$ dB / $\pm 6^\circ$
-35 dB to -25 dB	$\pm 3.0$ dB / $\pm 20^\circ$
Accuracy of transmission magnitude measurements <sup>5</sup>	Magnitude
-50 dB to 0 dB	$\pm 1$ dB
Trace noise magnitude <sup>6</sup>	0.005 dB rms
Temperature dependence	0.015 dB/°C

## Effective System Data

<b>1 MHz to 6 GHz</b>	
Directivity	46 dB
Source match	40 dB
Reflection tracking	$\pm 0.05$ dB

## Factory-Calibrated System Data

<b>1 MHz to 4 GHz</b>	
Directivity	36 dB
<b>4 GHz to 6 GHz</b>	
Directivity	32 dB

## Uncorrected System Performance

<b>1 MHz to 6 GHz</b>	
Directivity	15 dB (18 dB typ.)
Source match	15 dB (18 dB typ.)

[1] All specifications subject to change without notice. [2] Measurement of |S<sub>21</sub>| and |S<sub>12</sub>| using two reflectometers, both being connected to the same USB hub, applies over the temperature range of (23 ± 5) °C after 30 minutes of warming-up, with less than 1 °C deviation from the calibration temperature at high output power and IF bandwidth 100 Hz. [3] Reflection and transmission measurement accuracy applies over the temperature range of (73 ± 9) °F or (23 ± 5) °C after 30 minutes of warming-up, with less than 1 °C deviation from calibration temperature, at 0 dBm output power and IF BW 100 Hz. Frequency points have to be identical for measurement and calibration (no interpolation allowed). [4] Reflection specifications are based on an isolating DUT. [5] Transmission specifications are based on a matched DUT. Measurement of |S<sub>21</sub>| and |S<sub>12</sub>| using two devices, both being connected to the same USB hub. [6] IF bandwidth 1 kHz. © Copper Mountain Technologies - www.coppermountaintech.com - Rev. 2020Q2

# Specifications<sup>1</sup>

## Test Port

Power range	-35 dBm to -3 dBm (-40 dB to 0 dB, typ.)
Power resolution	0.25 dB typ.
Power accuracy	±1.5 dB typ.
Interference immunity	+17 dBm
Damage level	+23 dBm
Damage DC voltage	50 V

## Measurement Speed

Time per point	100 µs typ.
----------------	-------------

## Frequency Reference Input

Port	Ref 10 MHz
External reference frequency	10 MHz
Input level	0 dBm to 4 dBm
Input impedance	50 Ohm
Connector type	SMA, female

## Frequency Reference Output

Port	Ref 10 MHz
Internal reference frequency	10 MHz
Output reference signal level at 50 Ohm impedance	-1 dBm to 5 dBm
Connector type	SMA, female

## Trigger Input

Port	TRIG IN / OUT
External trigger source	3.3 V CMOS, TTL compatible
Pulse width	≥1 µs
Polarity	positive or negative
Input impedance	≥10 kOhm
Connector type	SMA, female

## Trigger Output

Port	TRIG IN / OUT
Max output current	20 mA
Trigger output	3.3 V CMOS, TTL compatible
Polarity	Positive or negative
Connector type	SMA, female

# Specifications<sup>1</sup>

## System & Power

Operating system	Windows 7 and above
CPU frequency	1.0 GHz
RAM	2 GB
Interface	USB 2.0
Connector type	Mini USB B
Power consumption	3.5 W

## Calibration

Recommended factory adjustment interval	3 Years
---	---------

## Dimensions


Weight	0.35 kg (12.3 oz)
Length	161 mm
Width	65 mm
Height	28 mm

## Environmental Specifications


Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

# Reflection Accuracy Plots


## Reflection Magnitude Errors

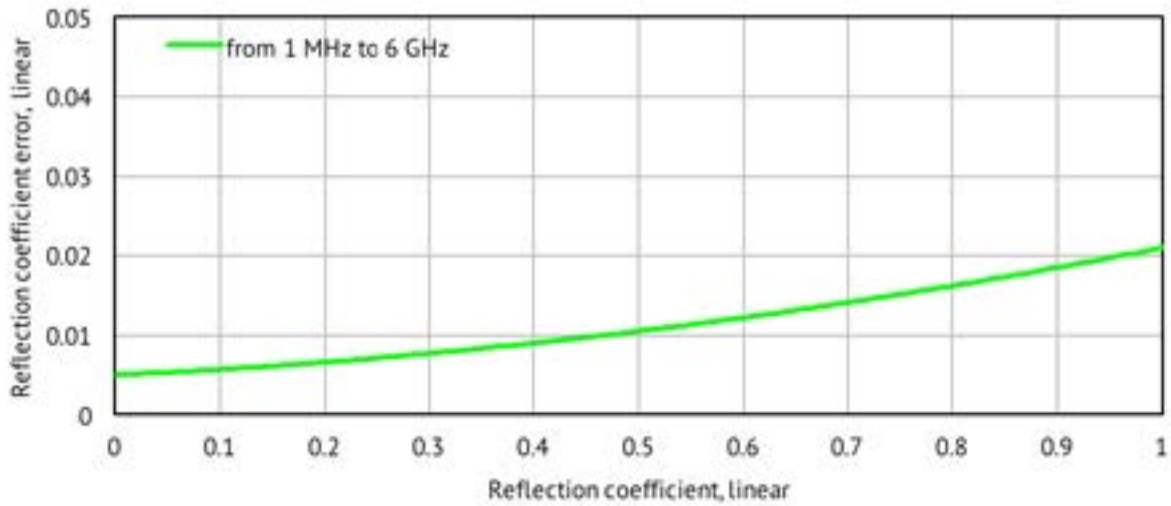

Specifications are based on isolating DUT ( $S_{21} = S_{12} = 0$ )

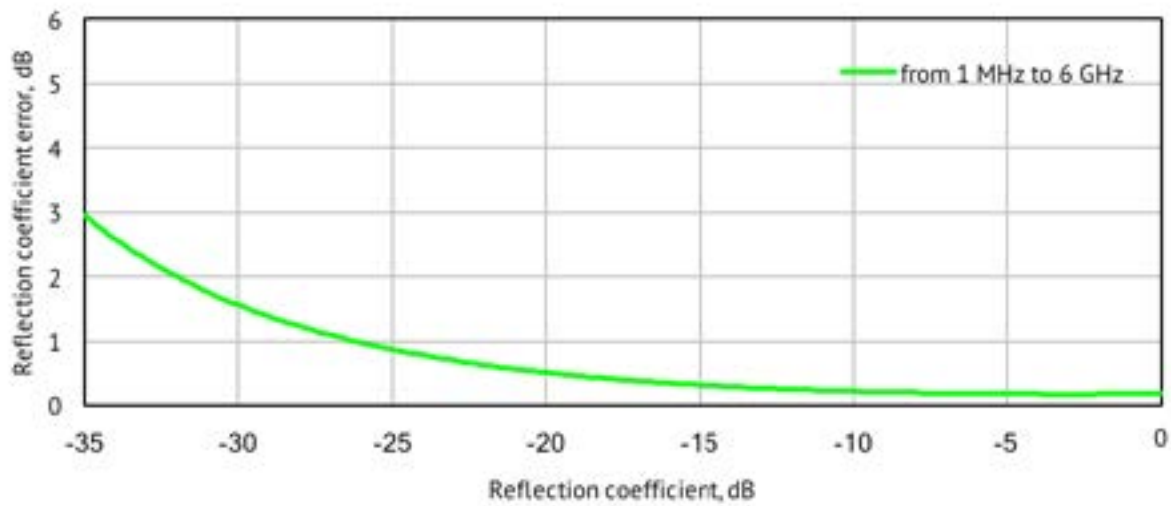

Specifications are based on isolating DUT ( $S_{21} = S_{12} = 0$ )

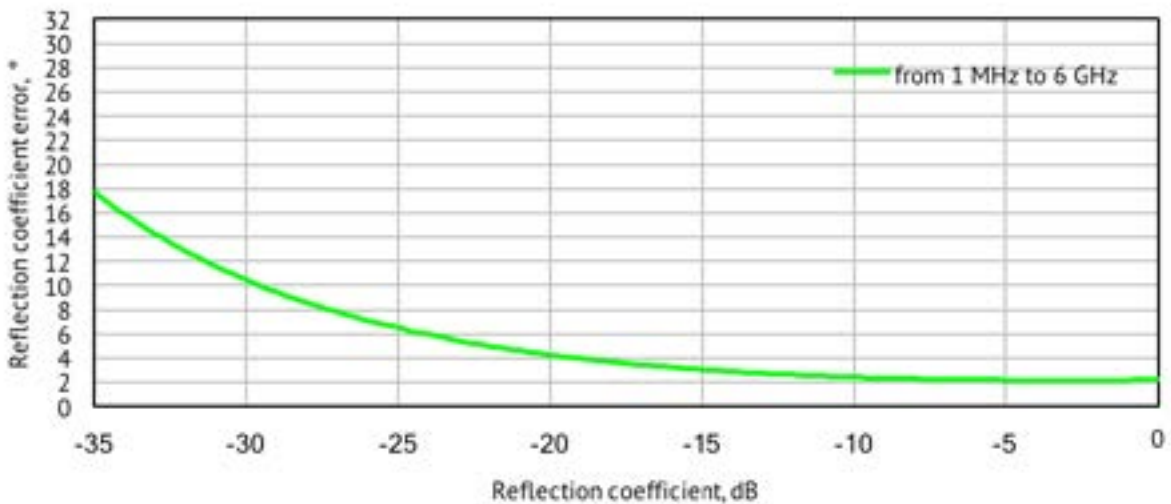

Technology is supposed to move. It's supposed to change and update and progress. It's not meant to sit stagnant year after year simply because that's how things have always been done.

The engineers at Copper Mountain Technologies are creative problem solvers. They know the people using VNAs don't just need one giant machine in a lab. They know that VNAs are needed in the field, requiring portability and flexibility. Data needs to be quickly transferred, and a test setup needs to be easily automated and recalled for various applications. The engineers at Copper Mountain Technologies are rethinking the way VNAs are developed and used.

Copper Mountain Technologies' VNAs are designed to work with the Windows PC you already use via USB interface. After installing the test software, you have a top-quality VNA at a fraction of the cost of a traditional analyzer. The result is a faster, more effective test process that fits into the modern workspace. This is the creativity that makes Copper Mountain Technologies stand out above the crowd.

We're creative. We're problem solvers.



	R60	R140	R180
Frequency Range	1 MHz to 6 GHz	85 MHz to 14 GHz	1 MHz to 18 GHz
External frequency reference	10 MHz	32 MHz	10 MHz
External trigger	Input/Output	Input	Input/Output
Power connector	Reinforced (rugged) USB mini-B	USB mini-B	Reinforced (rugged) USB-C or +5V external
Adjustable output power	0.25 dB steps	Hi/Low/Off	0.05 dB steps
S21, S12 measurements		Scalar, with specialized software (available upon request)	

631 E. New York St | Indianapolis, IN | 46202  
[www.coppermountaintech.com](http://www.coppermountaintech.com)

USA: +1.317.222.5400  
 Singapore: +65.6323.6546  
 Latin America: +1.954.706.5920  
 London: +44 75 03 68 21 13